

SPECIFICATION FOR APPROVAL

承认书

CUSTOMER

客户:

CUSTOMER NO.

客户料号.:

SKY PART NO.

我司料号.:

H1102NL

DESCRIPTION:

10/100 BASE-TX

ATTACHMENT:

■ SPECIFICATION

■ AMPLE Q'TY OF SAMPLES _____PCS

CUSTOMER APPROVAL

(客户承认章)

SKY APPROVAL

SKMAG 思科飞尔技术(深圳)有限公司

SALES BY
(业务员):

游晚舟

CHECKED BY
(工程审核):

APPROVAL BY
(批准):

陈晓娜


SKMAG 思科飞尔技术(深圳)有限公司

Siscofel Technology(Shen Zhen)Co.,Ltd.


Tel:0755-23203979 15602918199 Contact:Serena Chen

www.siscofer.com

A. MECHANICAL(unit:mm)

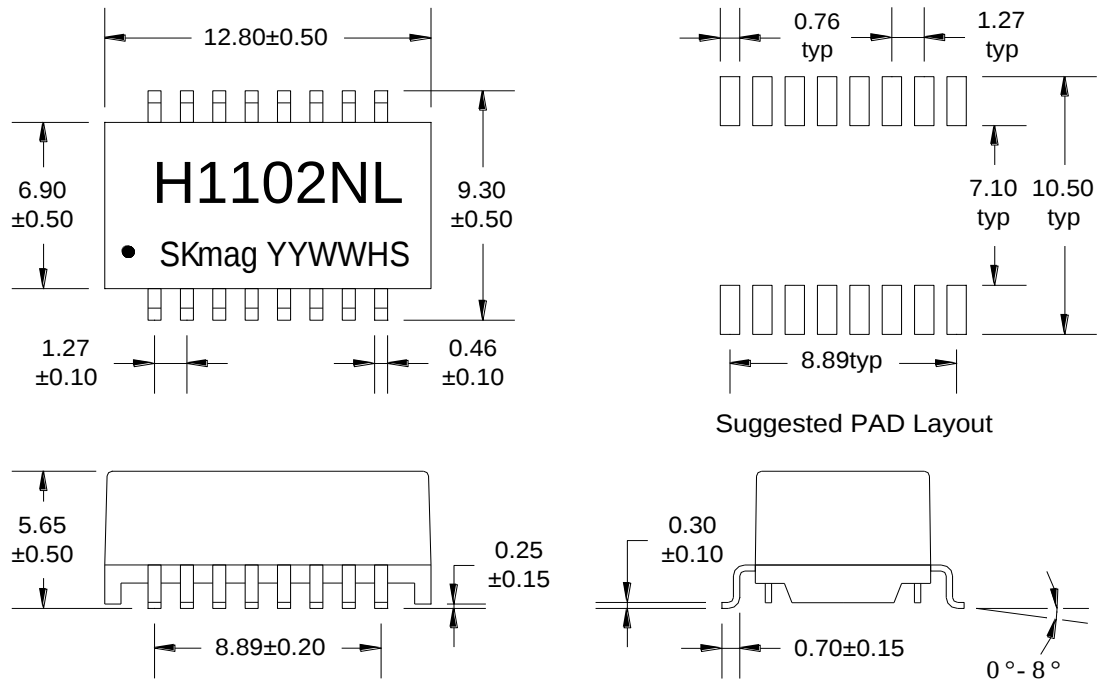

B. SCHEMATICS

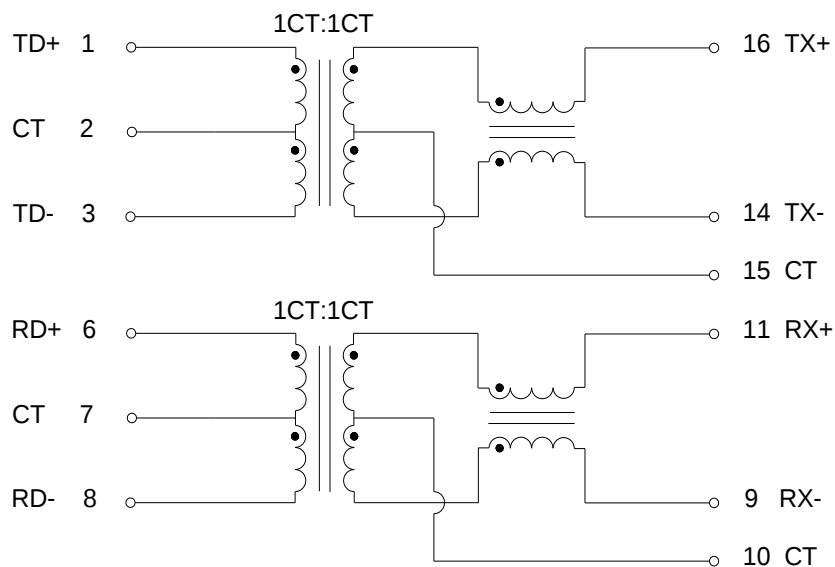

DESCRIPTION	SUR P/N	SPEC NO.	REV: R1
10/100 BASE-TX	H1102NL		PAGE: 2/6





C. ELECTRICAL SPECIFICATIONS @25°C


1. OCL: 350 uH Min @ 100 KHz, 0.1V with 8mA DC BIAS
2. Leakage Inductance: 0.5uH Max @ 100KHz, 0.1V
3. DCR: 1400mΩ Max
4. Turns Ratio: 1CT:1CT ±5%
5. CW/W: 35 pF Max @ 100KHz, 0.1V
6. Insertion Loss: -1.1 dB Max @ 1-100 MHz
7. Return Loss: -18 dB Min @ 1-30 MHz
-14.4 dB Min @ 40 MHz
-13.1 dB Min @ 50 MHz
-12 dB Min @ 60-80 MHz
8. Cross Talk: -30 dB Min @ 1-100 MHz
9. CMRR/DCMR: -30 dB Min @ 1-100 MHz
10. Isolation Hipot: 1500VAC 1mA 60S
11. Operating temperature 0°C to +70°C
12. Storage temperature -20°C to +125°C

DESCRIPTION	SUR P/N	SPEC NO.	REV: R1
10/100 BASE-TX	H1102NL		PAGE: 3/6


D. PACKAGE INFORMATION

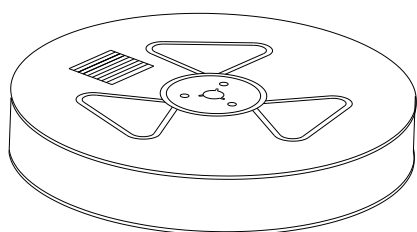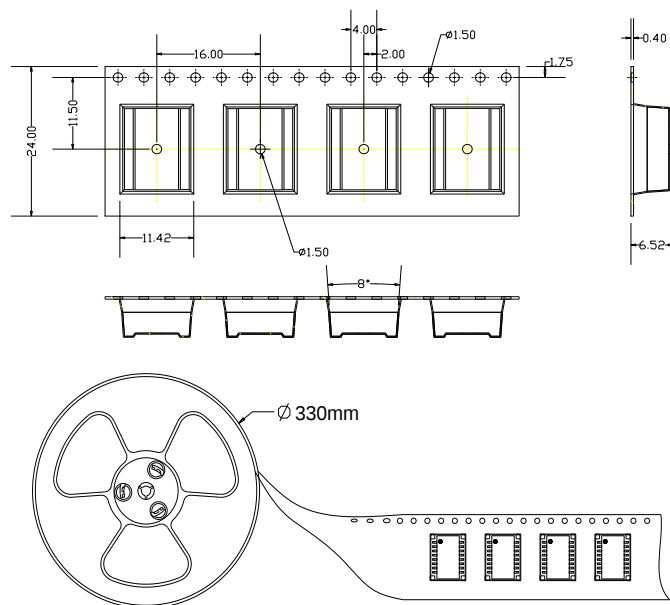


three reel

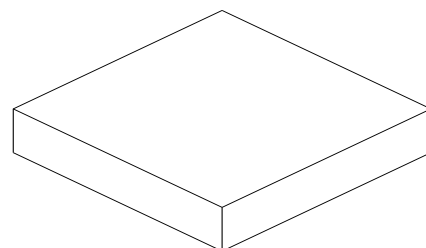

Inner Carton

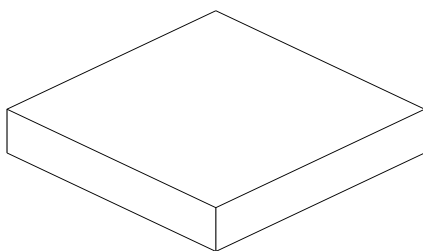

two Inner Carton

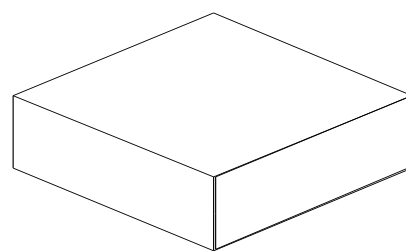

Export Carton

Package Quantity:

One Reel=650Pcs

One Export Carton=650*8=5200Pcs

DESCRIPTION	SUR P/N	SPEC NO.	REV: R1
10/100 BASE-TX	H1102NL		PAGE: 4/6