

SPECIFICATION FOR APPROVAL

承认书

CUSTOMER

客户:

CUSTOMER NO.

客户料号.:

SKY PART NO.

我司料号.:

D20601G

DESCRIPTION:

10/100 BASE-TX

ATTACHMENT:

■ SPECIFICATION

■ AMPLE Q'TY OF SAMPLES _____PCS

CUSTOMER APPROVAL

(客户承认章)

SKY APPROVAL

SKMAG 思科飞尔技术(深圳)有限公司

SALES BY
(业务员):

游晚舟

CHECKED BY
(工程审核):

APPROVAL BY
(批准):

陈晓娜




思科飞尔技术(深圳)有限公司
Siscofer Technology(Shen Zhen)Co.,Ltd.

Tel:0755-23203979 15602918199 Contact:Serena Chen


www.siscofer.com



A. MECHANICAL(unit:mm)

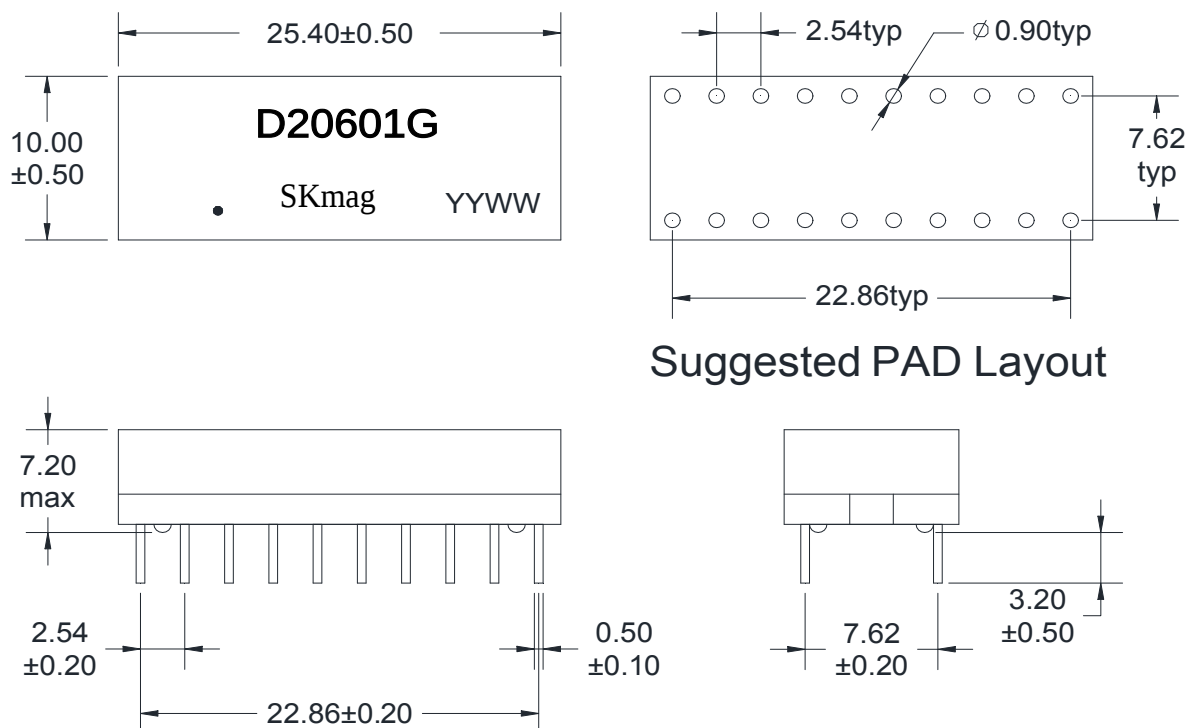

B. SCHEMATICS

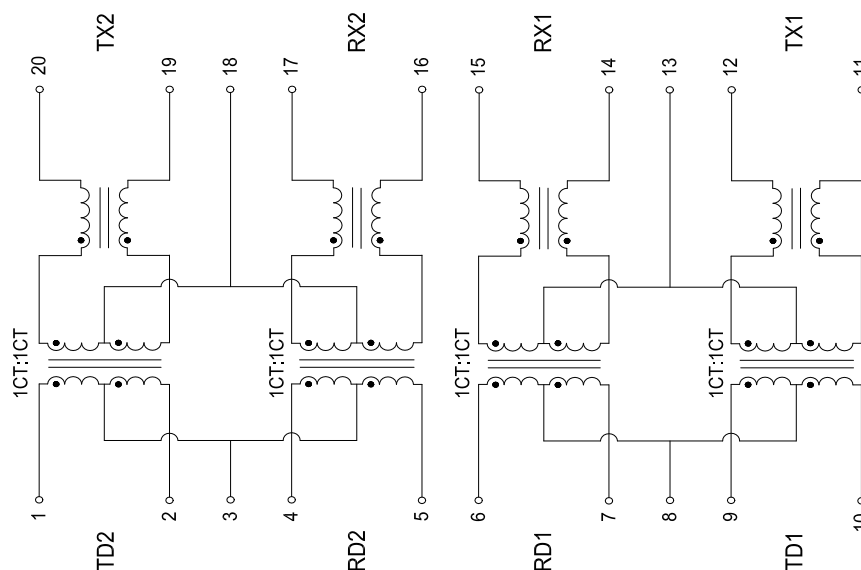

DESCRIPTION	P/N	SPEC NO.	REV: R1
10/100 BASE-TX	D20601 G		PAGE: 2/5




C. ELECTRICAL SPECIFICATIONS @25°C


1. OCL: 350uH Min @ 100 KHz, 0.1V with 8mA DC BIAS
2. Leakage Inductance: 0.5uH Max @ 100KHz, 0.1V
3. DCR: 1400mΩ Max
4. Turns Ratio: 1CT:1CT±5%
5. Insertion Loss: -1.1 dB Max @ 1-100 MHz
6. Return Loss: -18 dB Min @ 1-30 MHz
-14.4 dB Min @ 40 MHz
-13.1 dB Min @ 50 MHz
-12 dB Min @ 60-80 MHz
7. Cross Talk: -30 dB Min @ 1-100 MHz
8. Common Mode Rejection: -30 dB Min @ 1-100 MHz
9. Isolation Hipot: 1500VAC 1mA 60S
10. Operating temperature 0°C to +70°C
11. Storage temperature -40°C to +85°C

DESCRIPTION	P/N	SPEC NO.	REV: R1
10/100 BASE-TX	D20601 G		PAGE: 3/5

D. PACKAGE INFORMATION

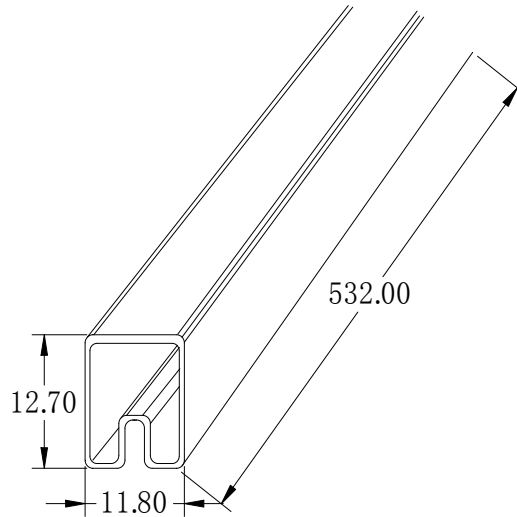

Tube:532.00*11.80*12.70mm

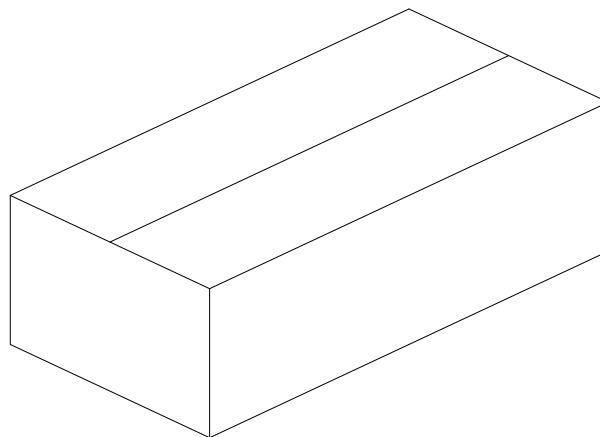

Carton: L553*W418*H150mm

Package Quantity:

One Tube=20Pcs

One Carton=20*320=6400Pcs

1.Put moisture-proof bags in cartons

2.Put in the product and put a baffle on it

3.Put the second layer of product and another baffle


4.Tape the cartons together



DESCRIPTION	SUR P/N	SPEC NO.	REV: R1
10/100 BASE-TX	D20601 G		PAGE: 4/5



E. RECOMMEND WAVE SOLDERING CURVE

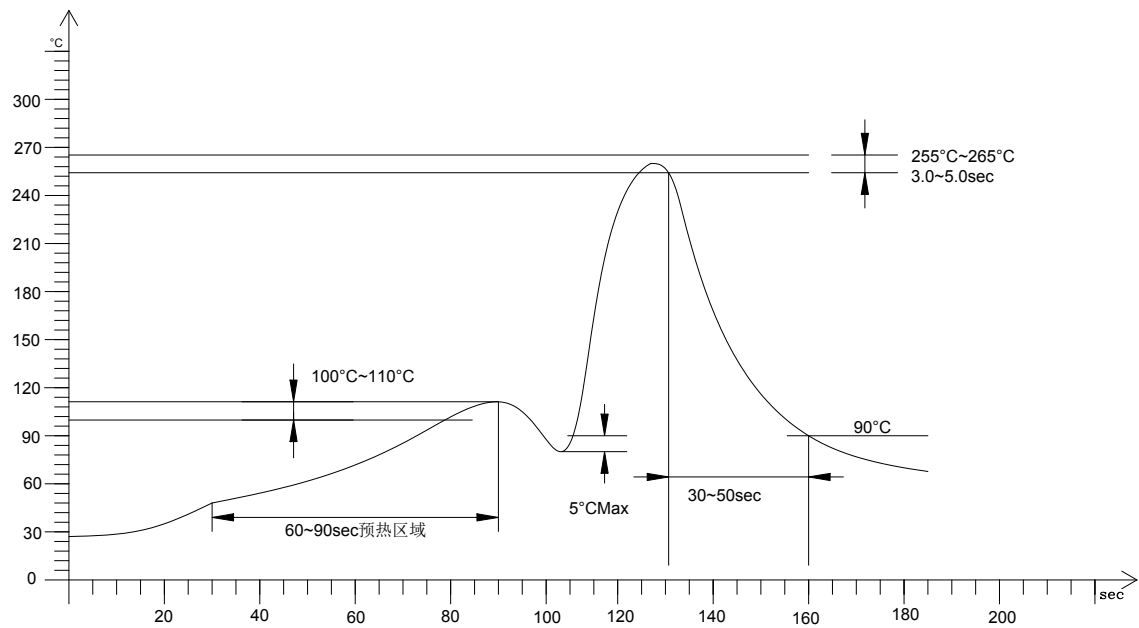

DESCRIPTION	P/N	SPEC NO.	REV: R1
10/100 BASE-TX	D20601 G		PAGE: 5/5