

SPECIFICATION FOR APPROVAL

承认书

CUSTOMER

客户:

CUSTOMER NO.

客户料号.:

SKY PART NO.

我司料号.:

DQ2402-2.5G

DESCRIPTION:

ATTACHMENT:

■ SPECIFICATION

■ AMPLE Q'TY OF SAMPLES _____PCS

CUSTOMER APPROVAL

(客户承认章)

SKY APPROVAL

SKMAG

思科飞尔技术(深圳)有限公司
Siscofer Technology(Shen Zhen)Co.,Ltd.

SALES BY

(业务员):

游晚舟

CHECKED BY

(工程审核):

APPROVAL BY

(批准):

陈晓娜

SKMAG

思科飞尔技术(深圳)有限公司
Siscofer Technology(Shen Zhen)Co.,Ltd.


Tel:0755-23203979 15602918199 Contact:Serena Chen

www.siscofer.com


RECORD OF REVISION

[illegible]

A: MECHANICAL

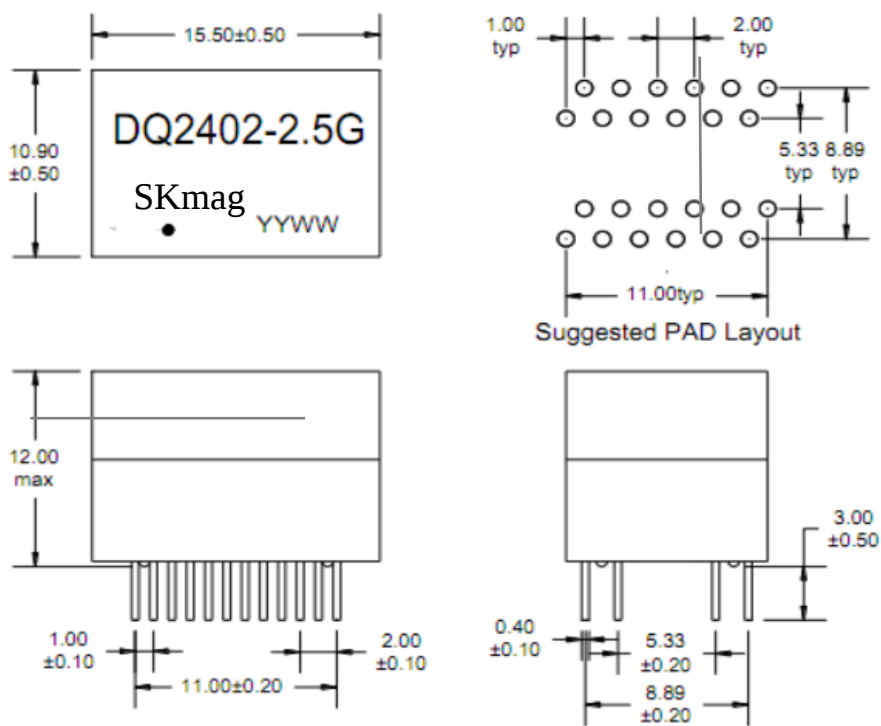

B: SCHEMATICS

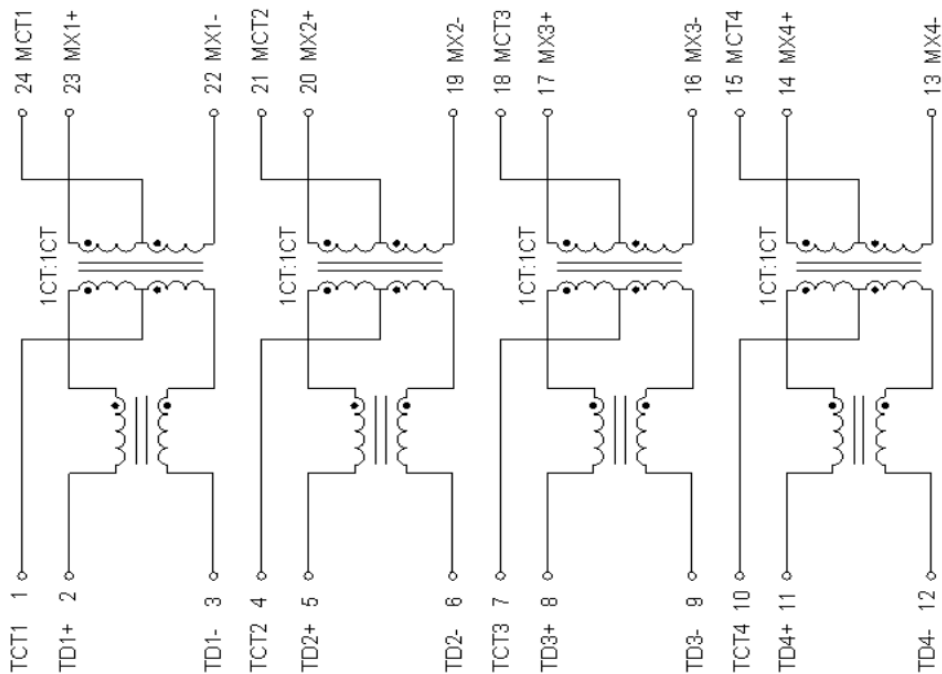


DESCRIPTION	SUR P/N	SPEC NO.	REV: R0
2.5G BASE-T	DQ2402-2.5G		PAGE: 3/5

C. ELECTRICAL SPECIFICATIONS @25°C

1. Complying with IEEE 802.3bz standard.
- 2.OCL:200 uH Min @ 100 KHz, 0.1V .
- 3.Leakage Inductance: 0.5uH Max @ 100KHz, 0.1V.
- 4.DCR: 1.2 Ω Max.
- 5.Cw/w: 25pF TYP.
- 6.Turns Ratio: 1CT:1CT $\pm$ 5%
- 7.Insertion Loss: -1.1 dB Max @ 1-125 MHz
-2.0 dB Max@ 125-200MHz .
- 8.Return Loss(@Load 100 Ω): -16 dB Min @ 1-40 MHz
-16+10log(f/40)dB Min @ 40-200 MHz
- 9.Cross Talk: -35 dB Min @ 1-100 MHz
-33 dB Min@ 100-200MHz .
10. Common Mode Rejection:-30 dB Min @1-125MHz.
-25 dB Min @125-200MHz.
- 12.Isolation Hi-pot: 1500VAC 1mA 60S
- 13.Operating temperature :0°C to +70°C
- 14.Storage temperature -25°C to +105°C
- 15.MSL: grade 1.
16. Compliant RoHS-6.


DESCRIPTION	SUR P/N	SPEC NO.	REV: R0
2.5G BASE-T	DQ2402-2.5G		PAGE: 4/5

D. THE RECOMMENDED WAVE SOLDERING CURVE IS AS BELOW :

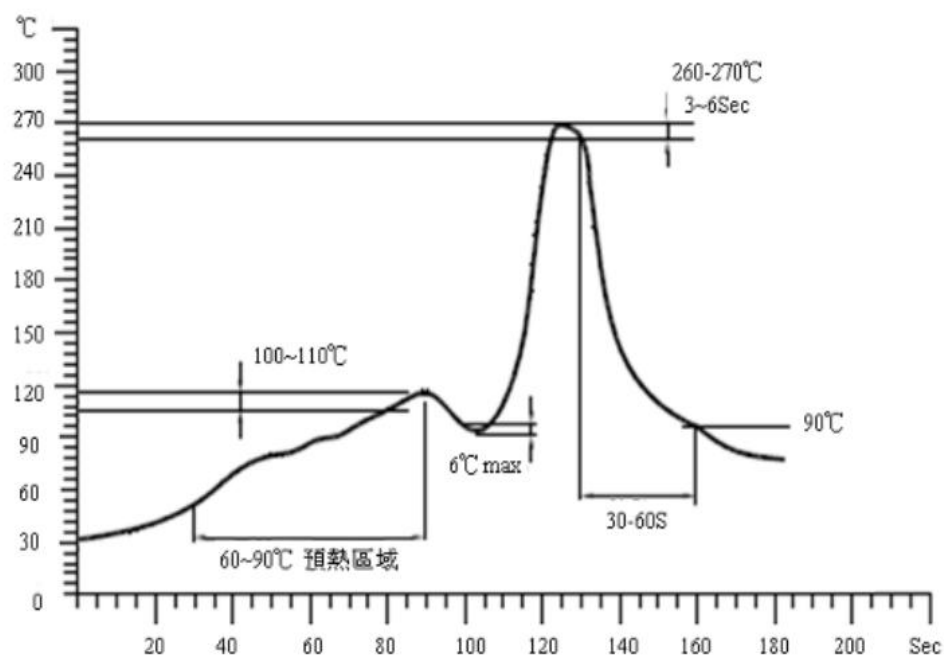


E. PACKAGE INFORMATION:

One Tube =32Pcs

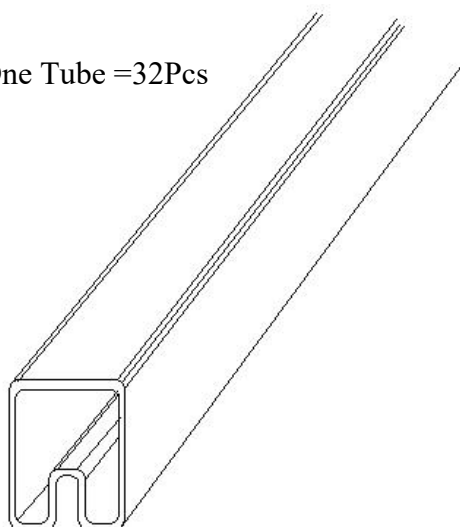

One Export Carton

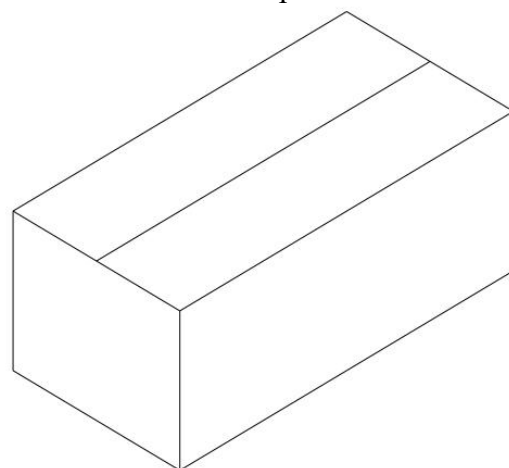

Package Quantity

One Tube =32Pcs

One Export Carton=5120Pcs

DESCRIPTION	SUR P/N	SPEC NO.	REV: R0
2.5G BASE-T	DQ2402-2.5G		PAGE: 5/5