

APPROVED SHEET

CUSTOMER:

CUSTOMER P/N:

YLT P/N:

RB1101QG02GA

REV:

A

SPEC NO.

RB1-0082

DESCRIPTION:

RJ45 1X1 Tab UP

100/1000 Base-TX

Contact Area: 6u" Gold

LED: L-Orange/Green;L-Yellow

CUSTOMER APPROVAL		COMPANY APPROVAL	
INSPECTED BY:		ISSUED BY:	
CHECKED BY:		CHECKED BY:	
APPROVED BY:		APPROVED BY:	
APPROVED DATE:		ISSUED DATE:	

思科飞尔技术（深圳）有限公司

Siscofer Technology(Shen Zhen)Co.,Ltd.

总部地址：深圳市宝安区新安街道创业二路中粮创芯研发中心4-307室

工厂地址：四川省绵阳市涪城区文武中路218号电子制造产业园9栋3号3楼

Tel:0755-83845349 15602918199


www.Siscofer.com



品 名P/N: RB1101QG02GA			
日 期	REV	变更内容	申请人
2023/11/11	A	新版发行	



A. MECHANICAL(unit:mm)

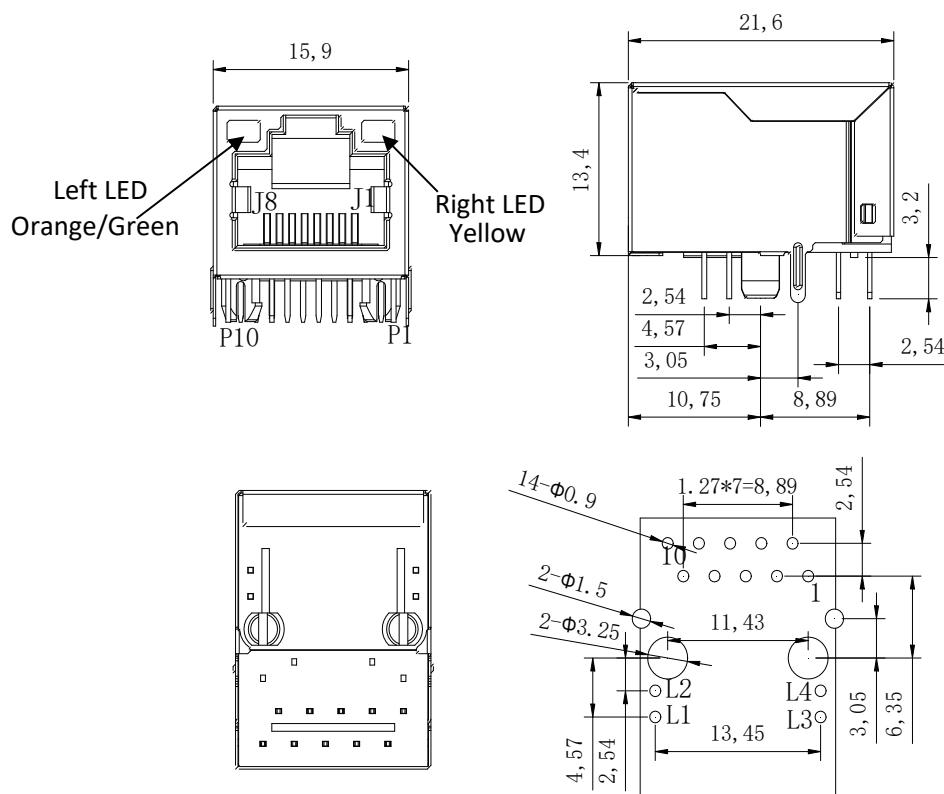

General Tolerance:

X.X : ± 0.25

X.XX : ± 0.20

X.XXX: ± 0.10

Notes:

(1).Material:

Housing: Thermoplastic, PBT, Black, UL 94V-0.

Inner: Thermoplastic,PBT,Black,UL 94V-0.

Contact: Phosphor Bronze, Thickness=0.35mm.

Shell: Brass, Thickness=0.20mm.

(2).Finish:

Contact: 50 μ " Min Nickel Underplating All Area.

100 μ " Min Tin On Solder Tail.

6u" Gold On Contact Area.

Shell: 30 μ " Min Nickel Underplating All Area.

(3).Durability Operating Life:



750 Cycles Min.

(4).Jack Cavity Conforms To FCC Rules And Regulations Part 68, Subpart F.

DESCRIPTION	SUR P/N	SPEC NO.	REV: A
RJ45 1X1 Tab UP	RB1101QG02GA	RB1-0082	PAGE: 1/4



B.SCHEMATICS

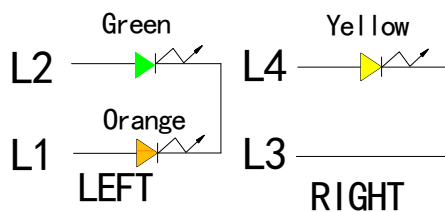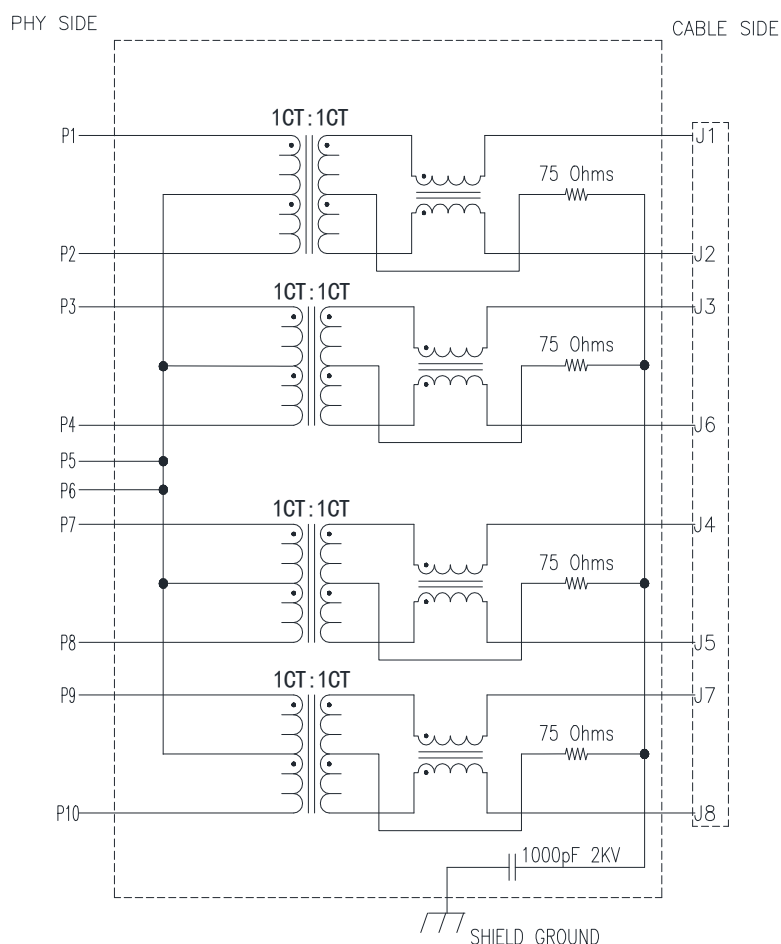

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	565	20mA	1.8-2.4V
Yellow	585	20mA	1.7-2.5V
Orange	610	20mA	1.7-2.5V

DESCRIPTION	SUR P/N	SPEC NO.	REV: A
RJ45 1X1 Tab UP	RB1101QG02GA	RB1-0082	PAGE: 2/4




C. ELECTRICAL SPECIFICATIONS @25°C

1. OCL: 350 μ H min @100KHz 100mV 8mA DC Bias
2. Turns Ratio: 1CT:1CT $\pm$ 3%
3. Insertion Loss: -1.0dB max @ 1~100 MHz
4. Return Loss: -18 dB Min @ 1~30 MHz.load 100 Ω
-14 dB Min @ 30~60 MHz.load 100 Ω
-12 dB Min @ 60~80 MHz.load 100 Ω
-10 dB Min @ 80~100 MHz.load 100 Ω
5. Common Mode Rejection: -30 dB Min @ 1-100 MHz
6. Cross Talk: -30 dB Min @ 1-100 MHz
7. Isolation Hipot:2250VDC 1mA 60s
8. Operating temperature: -40°C to +85°C
9. Storage temperature: -40°C to +85°C
10. RoHS compliant

DESCRIPTION	SUR P/N	SPEC NO.	REV: A
RJ45 1X1 Tab UP	RB1101QG02GA	RB1-0082	PAGE: 3/4



D. RECOMMEND WAVE SOLDERING CURVE

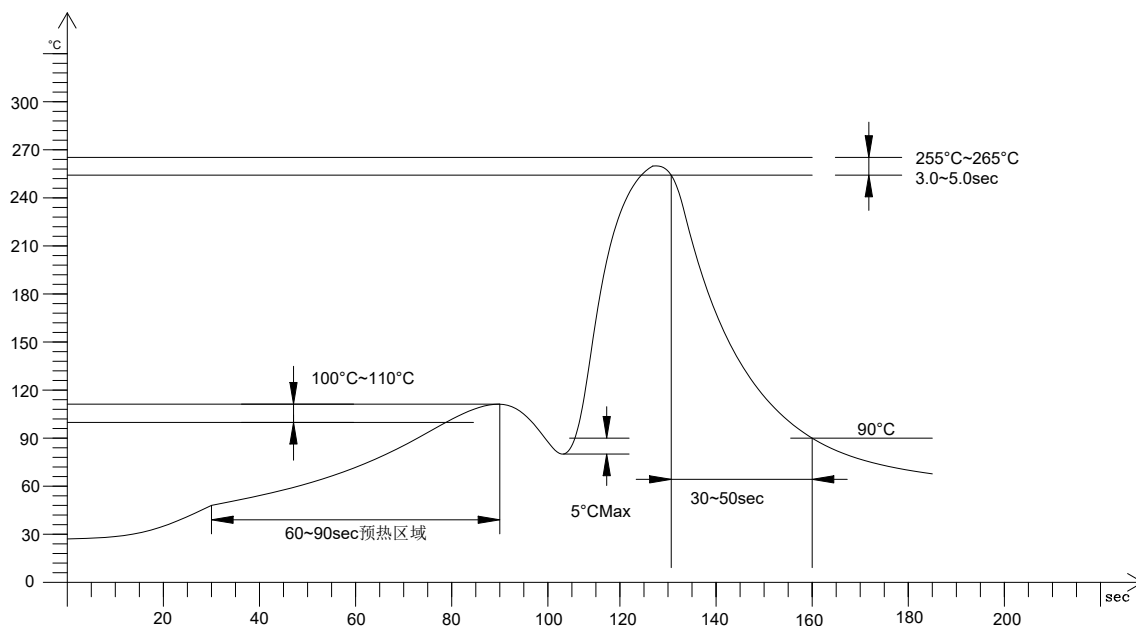

DESCRIPTION	SUR P/N	SPEC NO.	REV: A
RJ45 1X1 Tab UP	RB1101QG02GA	RB1-0082	PAGE: 4/4