



A. MECHANICAL(UNIT:mm)


RJ45 MECHANICAL NOTES:

REV	ECN NO	DESCRIPTION	DATE
A	/	New Drawing	2025/2/18


- 1.THE PRODUCT IS ROHS COMPLIANT.
- 2.ALL DIMENSIONS FOLLOW :
 - FCC SUBPART F, 68,500, FIGURE (C)(2)(I) & (C)(2)(II) & (C)(3)(I) IEC 60603-7
 - ALL PLUGS MUST BE MEETING THE REQUIREMENTS OF PLUG GO & NO-GO GAUGE.
- 3.GAUGE FOLLOW : FCC SUBPART F, 68,500, FIGURE (C)(4)(I) & (C)(5)(I)
 - THERE MUST BE NO DAMAGE TO HOUSING AND LOCKING LATCH.
 - THERE MUST BE NO NICKS AND CUTS IN CABLE.
 - DURABILITY : 750 CYCLES GENERALLY
- 4.PART CAN BE RECOMMENED FOR REFLOW SOLDERING PROCESS.
 - PEAK REFLOW SOLDERING TEMPERATURE IS 260°C MAX,10SECONDS MAX.
- 5.OPERATING TEMPERATURE:-40 TO +85°C;
- 6.STORAGE TEMPERATURE: -40 TO +85°C
- 7.MATERIAL:
 - 7.1 HOUSING: THERMOPLASTIC PBT.
FLAMMABILITY RATING ,UL 94V-0; COLOR:BLACK.
 - 7.2 SHELL: BRASS C2680H, THICKNESS=0.20mm.PLATING NICKEL 30u"Min;
 - 7.3 RJ TERMINAL: THERMOPLASTIC PBT,COLOR:BLACK;UL 94V-0;
PIN:THICKNESS=0.30mm.PHOS-BRONZE C5210EH.
PLATING: 50u" MIN NICKEL UNDERPLATING ALL AREA.
100u" MIN TIN ON SOLDER TAIL.
6u" GOLD ON CONTACT AREA.
 - 7.4 INPUT TERMINAL: PHY PIN:THICKNESS=0.30mm. BRASS C2680H.
LED PIN:THICKNESS=0.45mm. BRASS C2680H.
PLATING: 50u" MIN NICKEL UNDERPLATING ALL AREA.
100u" MIN TIN ON SOLDER TAIL.

8.CODING PRINCIPLES

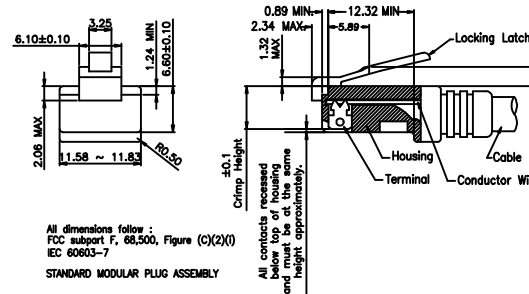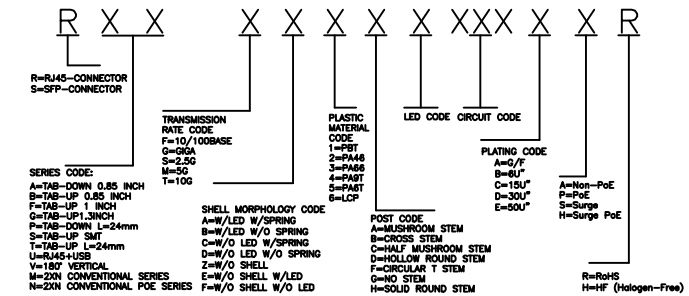


X. ± 0.40	APPD: LOUIS	 思科飞尔技术(深圳)有限公司 SISCOFER TECHNOLOGY (SHENZHEN) CO.LTD
.X ± 0.30	CHKD: ZHOU	
.XX ± 0.25	DR: LIANG	PART NO: RF2-GA1A2117BAR
.XXX ± 0.20	UNITS: mm	TITLE: TAB UP 1X2Port 10/100/1000M BASE-T RJ45 JACK Magnetics
X* ± 3'		
UNITS: mm		
	SHEET: 1 OF 2	REV: DWG NO: REMARK:
	SCALE: 1:1	A RF2-0007 XXX-XXXX

B.SCHEMATICS

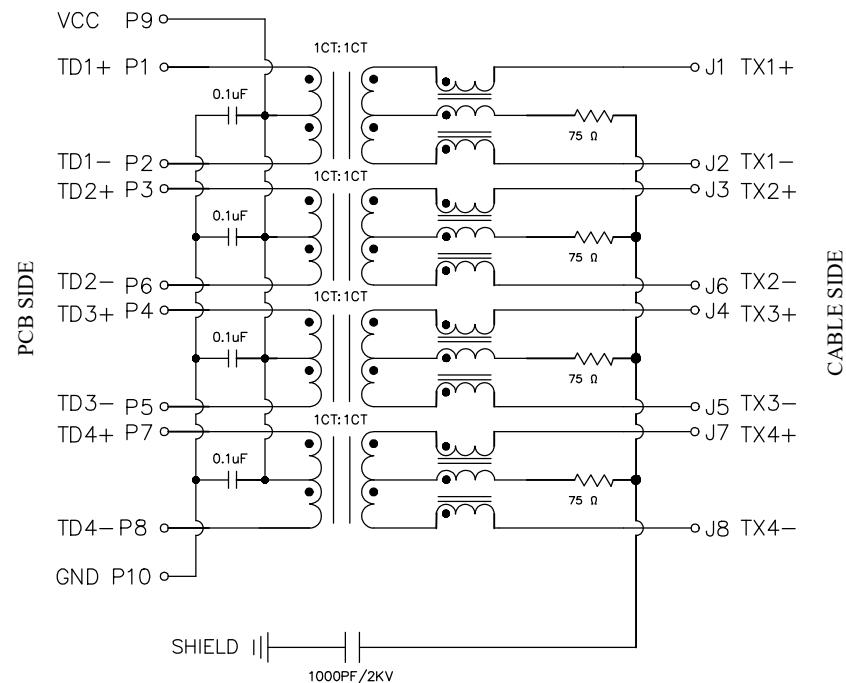

C:PIN ASSIGNMENT FOR PCB LAYOUT

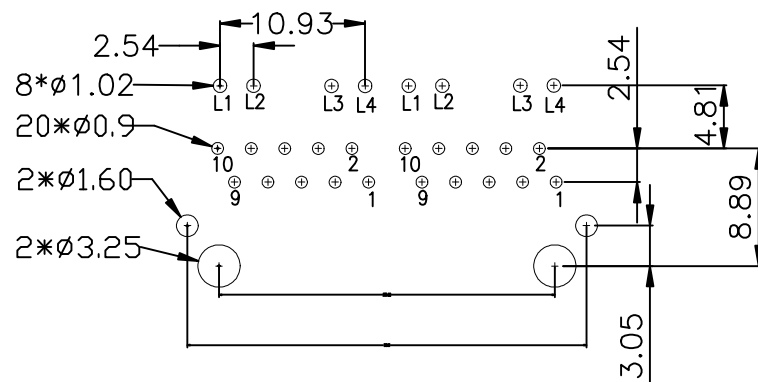

SUGGESTED PCB PAD LAYOUT
COMPONENT SIDE VIEW

D. ELECTRICAL SPECIFICATIONS @25°C

TRANSMITTER FILTER & RECEIVER FILTER

TYPE : BALANCE LOW PASS 100Ω IMPEDANCE

INSERTION LOSS : 1~120MHz -1.2dB MAX.

RETURN LOSS : 1~30MHz -18dB MIN. LOAD 100 Ω
 30~60MHz -16dB MIN. LOAD 100 Ω
 60~80MHz -12dB MIN. LOAD 100 Ω
 80~100MHz -10dB MIN. LOAD 100 Ω

COMMON MODE REJECTION
@1~100 MHz -30dB MIN.

CROSS TALK @ 1~100MHz -30dB MIN.

INDUCTANCE (OCL) @ 100KHz, 0.1V, 8mA DC BIAS 350 uH MIN.

DCR:1.2 OHM MAX

HIPOT TEST
PHY SIDE(INPUT) TO CABLE SIDE(OUTPUT) : 1500Vrms 60S

E:LED SPECIFICATION



Emitting Color	λ_p (nm)	V_f @ $I_f=20\text{mA}$	I_r @ $V_r=5\text{V}$
GREEN	570	1.7 ~2.6 V	10 μA max
YELLOW	590	1.7 ~2.6 V	10 μA max

X. ± 0.40	APPD: LOUIS	 思科飞尔技术（深圳）有限公司 SISCOFER TECHNOLOGY (SHENZHEN) CO.LTD	RF2-GA1A2117BAR			 RoHS Compliant	
.X ± 0.30							
.XX ± 0.25	CHKD: ZHOU						PART NO:
.XXX± 0.20							
X* ± 3' .X* ± 2'	DR: LIANG						
UNITS: mm							
	SHEET: 2 OF 2	REV:	DWG NO:	REMARK:		 RoHS Compliant	
	SCALE: 1:1	A	RF2-0007	XXX-XXXX			