

SPECIFICATION FOR APPROVAL

承认书

CUSTOMER

客户:

CUSTOMER NO.

客户料号.:

SKY PART NO.

我司料号.:

D12101G

DESCRIPTION:

10/100Base DIP Transformer

ATTACHMENT:

■ SPECIFICATION

■ AMPLE Q'TY OF SAMPLES _____PCS

CUSTOMER APPROVAL

(客户承认章)

SKY APPROVAL

SKMAG 思科飞尔技术(深圳)有限公司

SALES BY
(业务员):

游晚舟

CHECKED BY
(工程审核):

APPROVAL BY
(批准):

陈晓娜

SKMAG 思科飞尔技术(深圳)有限公司

Siscofel Technology(Shen Zhen)Co.,Ltd.

Tel:0755-23203979 15602918199 Contact:Serena Chen

www.siscofer.com



10/100Base DIP Transformer

Part Number: D12101 G

Page:1/2

- Compliant with IEEE 802.3 standard.
- RoHS compliant.
- Operating temperature range : 0°C to +70°C.
- Storage temperature range: - 20°C to +125°C


Electrical Specifications @ 25°C

Part Number	Turns Ratio (±5%)		OCL(uH Min) @100KHz/0.1V with 8.0mA DC	Insertion Loss (dB Max)	HI-POT (Vrms)
	TX	RX		0.3-100MHz	
D12101 G	1CT:1CT	1CT:1CT	350	-1.10	1500


Continue

Part Number	Return Loss (dB Min)					Cross Talk (dB Min)	DCMR (dB Min)
	30MHz	40MHz	60MHz	80MHz	100MHz	0.3-100 MHz	0.3-100 MHz
D12101 G	-18	-15	-13	-11	-10	-35	-30

Schematics:

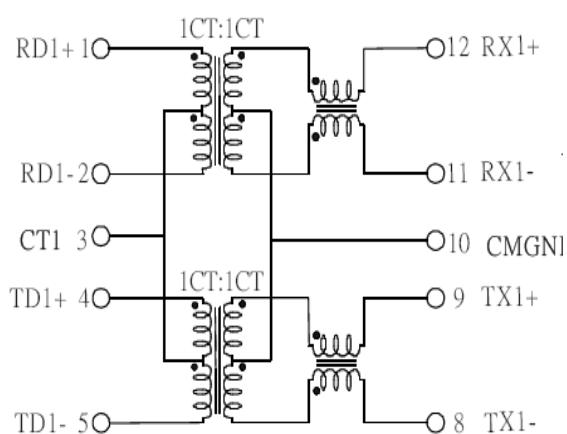

Mechanicals:

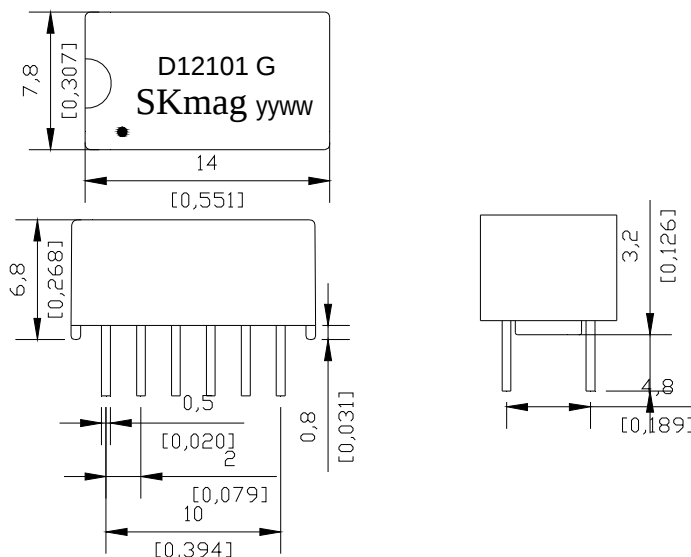

Units: mm/inch

Unless otherwise specified, tolerances:

xx. x0+/-0.25mm


0. xx+/-0.05mm

R0(06/12)


10/100Base DIP Transformer

Part Number: D12101 G


Page:2/2

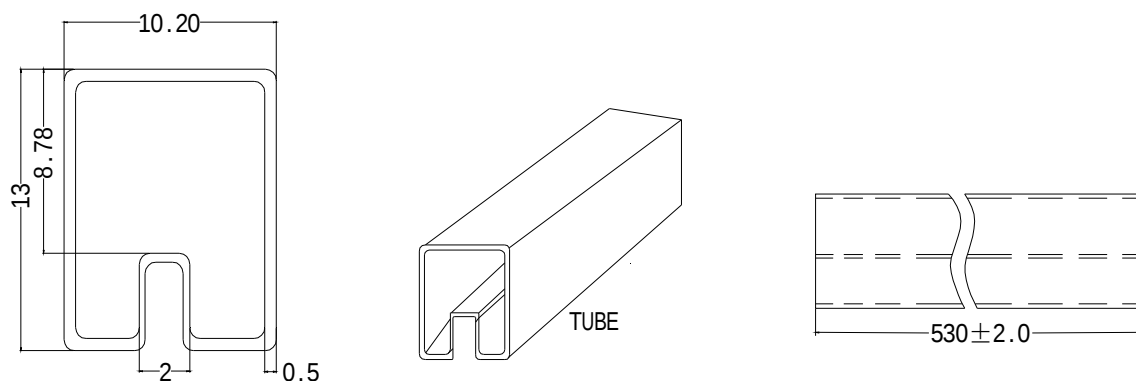

Tube mechanical dimension



Inner carton:570(L)X180(W)X100(H)



Export carton:580mm(L)X380mm(W)X240mm(H)

- 1、 One Tube:36PCS
- 2、 Inner carton:3240PCS
- 3、 Export carton :12960PCS

R0(06/12)